

STGCC9-SD




STGCC9



PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled sliding rear doors
- Sliding front doors or solid front
- Deck forced refrigeration
- Two adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Solid glass front that hinges at base – optional

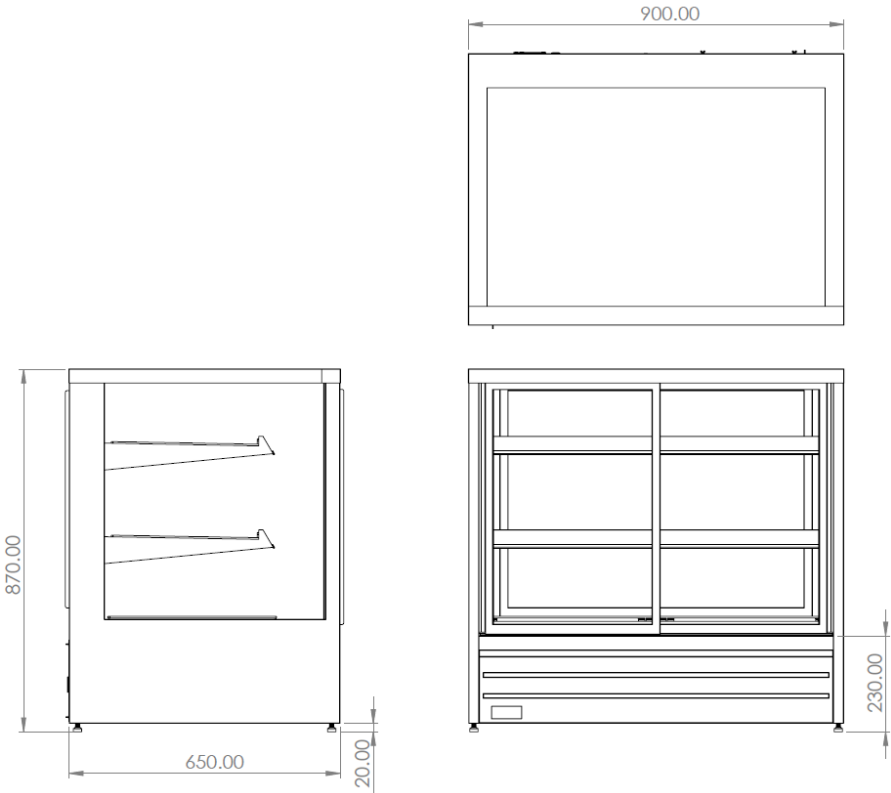

CABINET DIMENSIONS AND SPECIFICATIONS

MODEL		CABINET			SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG		DEG C	W X D	W X D	100MM UNITS	M²	Hz		KW 230V	AMP	NZ/AUS 10 AMP 3 PIN PLUG	UK 13 AMP 3 PIN PLUG	V	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
STGCC9 STGCC9-SD	900	650	870	175	2 + BASE	3-5	790 X 350	860 X 420	91	1.66	50	R290	0.67	3.3	10 AMP 3 PIN PLUG	13 AMP 3 PIN PLUG	220-240	1000	730	1040	182

STGCC12-SD




STGCC12



PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled sliding rear doors
- Sliding front doors or solid front
- Deck forced refrigeration
- Two adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Solid glass front that hinges at base – optional

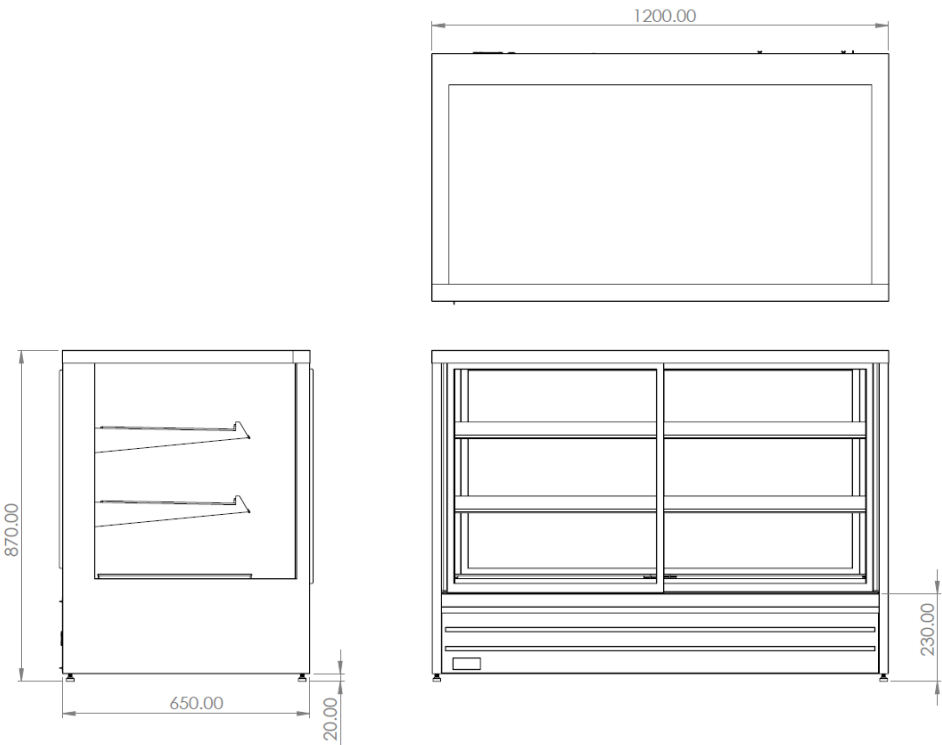

CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF W X D	BASE TRAY W X D	TOTAL FOOD 100MM UNITS	DISPLAY M²	FREQUENCY Hz	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE V	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG									KW 230V	AMP	NZ/AUS 10 AMP 3 PIN PLUG	UK 13 AMP 3 PIN PLUG		LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
STGCC12 STGCC12-SD	1200	650	870	210	2 + BASE	3-5	1090 X 350	1160 X 420	125	2.12	50	R290	0.67	3.3	10 AMP 3 PIN PLUG	13 AMP 3 PIN PLUG	220-240	1300	730	1040	217