


TTGOR6



PRODUCT FEATURES

- Open front
- Stainless steel hinged rear door
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Flat or angled shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Perspex riser

Maximum shelf load weight 15kg spread evenly
Adjustable rear or front venting



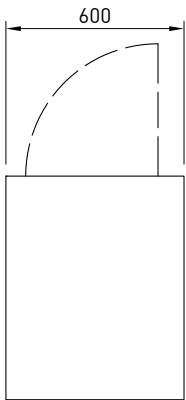


3M1

TEMPERATURE CLASS -1°C to +5°C

CC3

CLIMATE CLASS 3
25°C ambient and 60%RH

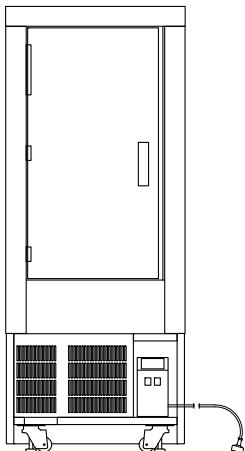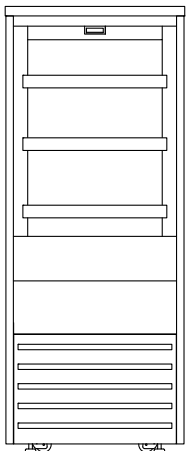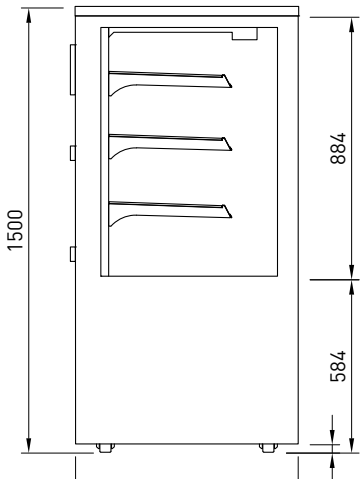

Prior to installation see, installation guidelines and ventilation requirements document

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT KG										KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGOR6	600	750	1500	192	3+ BASE	3-5	490 X 440	545 x 515	75	0.78	0.34	50 Hz	R290	1.10	6.0	3 PIN PLUG	3 PIN PLUG	220-240V	700	830	1670	223


TTGOR9



PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Flat or angled shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Perspex riser

Maximum shelf load weight 15kg spread evenly
Adjustable rear or front venting

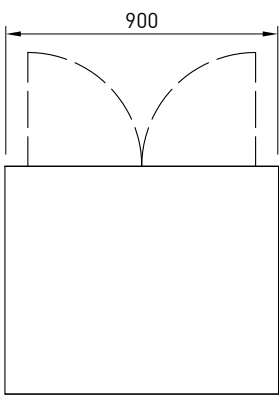


3M1

TEMPERATURE
CLASS -1°C to +5°C

CC3

CLIMATE CLASS 3
25°C ambient
and 60%RH

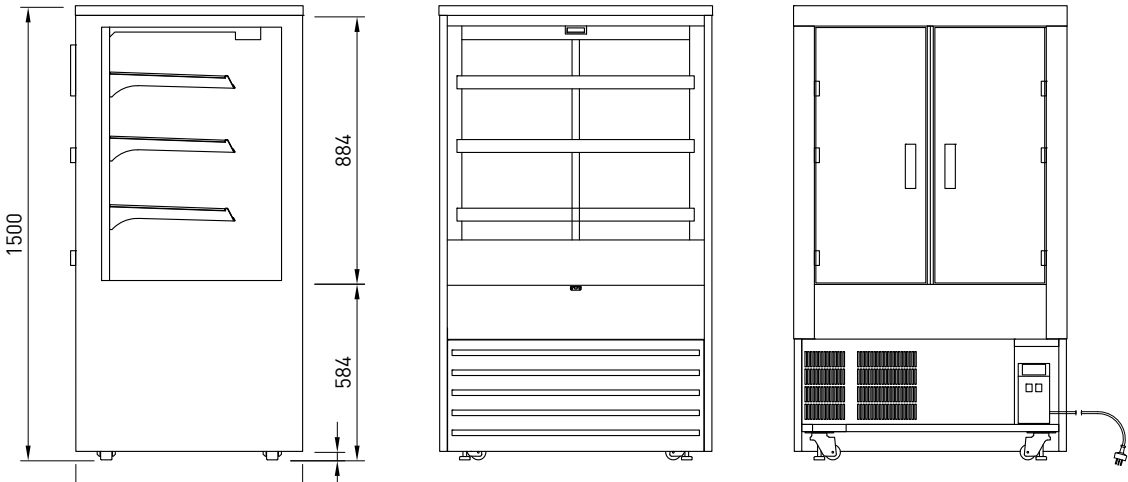

Prior to installation see, installation guidelines and ventilation requirements document

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT KG										KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGOR9	900	750	1500	224	3 + BASE	3-5	790 X 440	845 x 515	120	1.25	0.52	50 Hz	R290	1.10	6	3 PIN PLUG	3 PIN PLUG	220- 240V	1000	830	1670	251

TTGOR12

FREE-STANDING MULTIDECK OPEN FRONT REFRIGERATED

COSSIGA


TTGOR12



PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Flat or angled shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Perspex riser

Maximum shelf load weight 15kg spread evenly
Adjustable rear or front venting



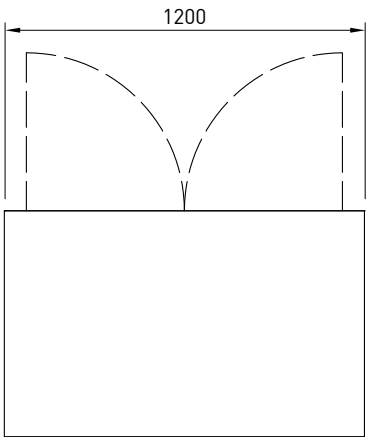


3M1

TEMPERATURE
CLASS -1°C to +5°C

CC3

CLIMATE CLASS 3
25°C ambient
and 60%RH

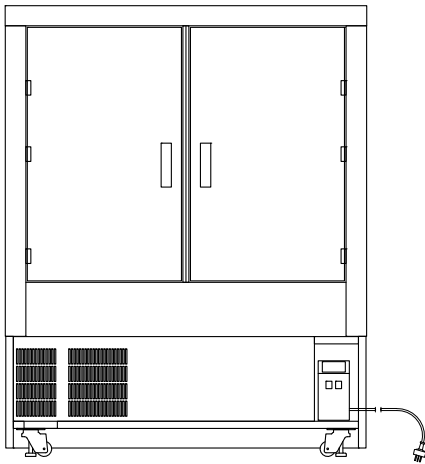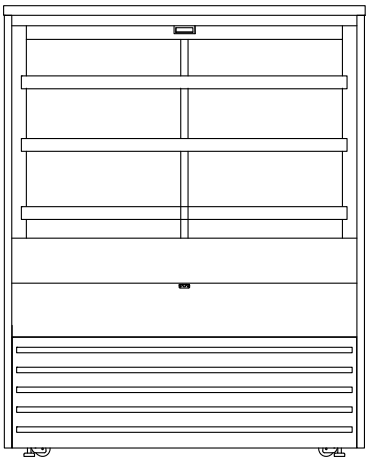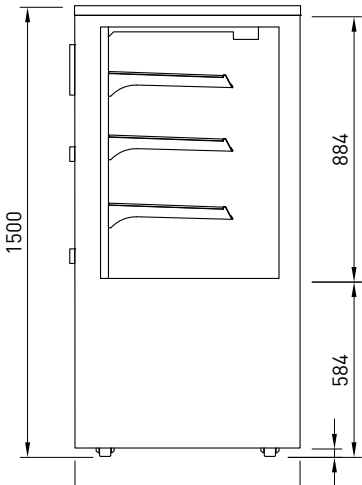

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT KG										KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGOR12	1200	750	1500	256	3 + BASE	3-5	1085 X 440	1145 x 515	155	1.71	0.69	50 Hz	R290	1.39	7.6	3 PIN PLUG	3 PIN PLUG	220- 240V	1300	830	1670	284