

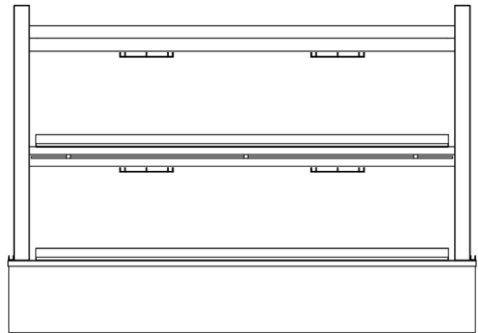


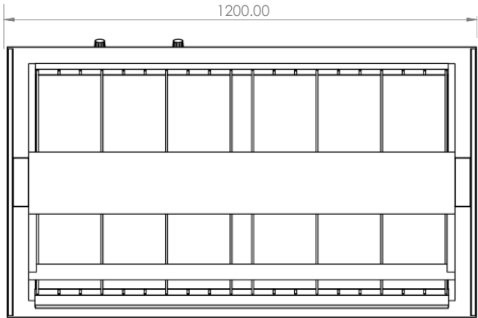

PRODUCT FEATURES

- Heated aluminium base and shelf
- Overhead ceramic heaters and LED lighting
- Digital thermostatic controller
- Ticket strips on shelf and base
- Removable stainless steel dividers to allow for varied spacings

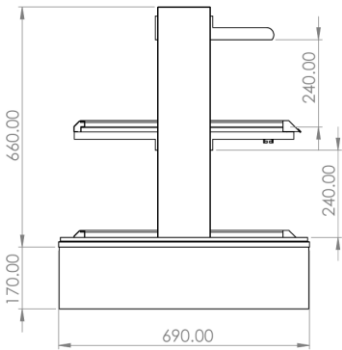


CABINET DIMENSIONS AND SPECIFICATIONS

MODEL		CABINET			BENCH TOP CUT OUT HOLE SIZE	SHELVING	OPERATING TEMP	SHELF	DISPLAY	FREQUENCY	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG	W X D		DEG C	W X D	M²	Hz	KW 230V	AMP	NZ/AUS 3 PIN PLUG 15 AMP	UK 13 AMP 3 PIN PLUG	V	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
OTSHC12	1200	690	830	126	1174 X 666	1 + BASE	75-85	1060 X 525	1.11	50/60	2.1	9.0	3 PIN PLUG 15 AMP	3 PIN PLUG	220-240	1300	770	1000	133



PRODUCT FEATURES

- Heated aluminium base and shelf
- Overhead ceramic heaters and LED lighting
- Digital thermostatic controller
- Ticket strips on shelf and base
- Removable stainless steel dividers to allow for varied spacings



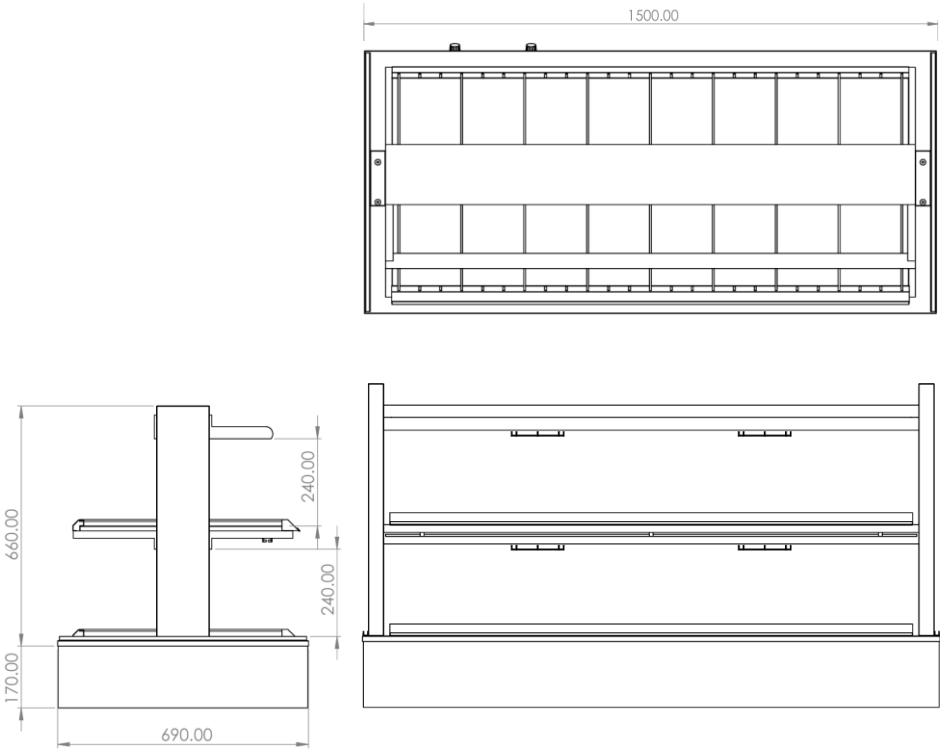


CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				BENCH TOP CUT OUT HOLE SIZE	SHELVING	OPERATING TEMP	SHELF	DISPLAY	FREQUENCY	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG							KW 230V	AMP	NZ/AUS 13 AMP	UK 13 AMP		LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
OTSHC15	1500	690	830	158	1474 X 666	1 + BASE	75-85	1360 X 525	1.43	50/60	2.6	11.4	LEAD ONLY	LEAD ONLY	220-240	1600	770	1000	166

PRODUCT FEATURES

- Heated aluminium base and shelf
- Overhead ceramic heaters and LED lighting
- Digital thermostatic controller
- Ticket strips on shelf and base
- Removable stainless steel dividers to allow for varied spacings

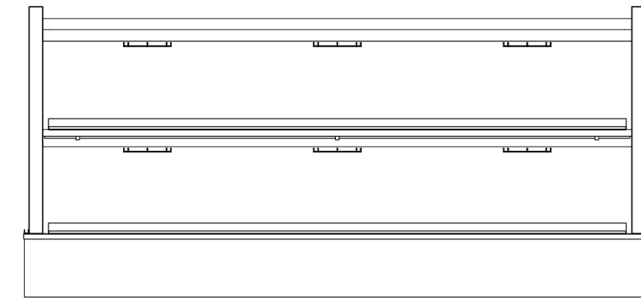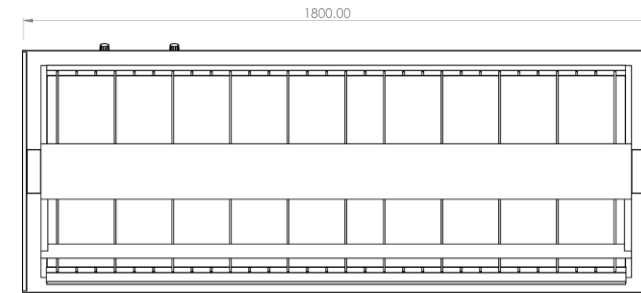

CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				BENCH TOP CUT OUT HOLE SIZE	SHELVING	OPERATING TEMP	SHELF	DISPLAY	FREQUENCY	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG	W X D		DEG C	W X D	M²	Hz	KW 230V	AMP	NZ/AUS LEAD ONLY	UK 13 AMP LEAD ONLY	V	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
OTSHC18	1800	690	830	189	1774 X 666	1 + BASE	75-85	1660 X 525	1.74	50/60	3.9	16.7	LEAD ONLY	LEAD ONLY	220-240	1900	770	1000	200